


Technical data sheet

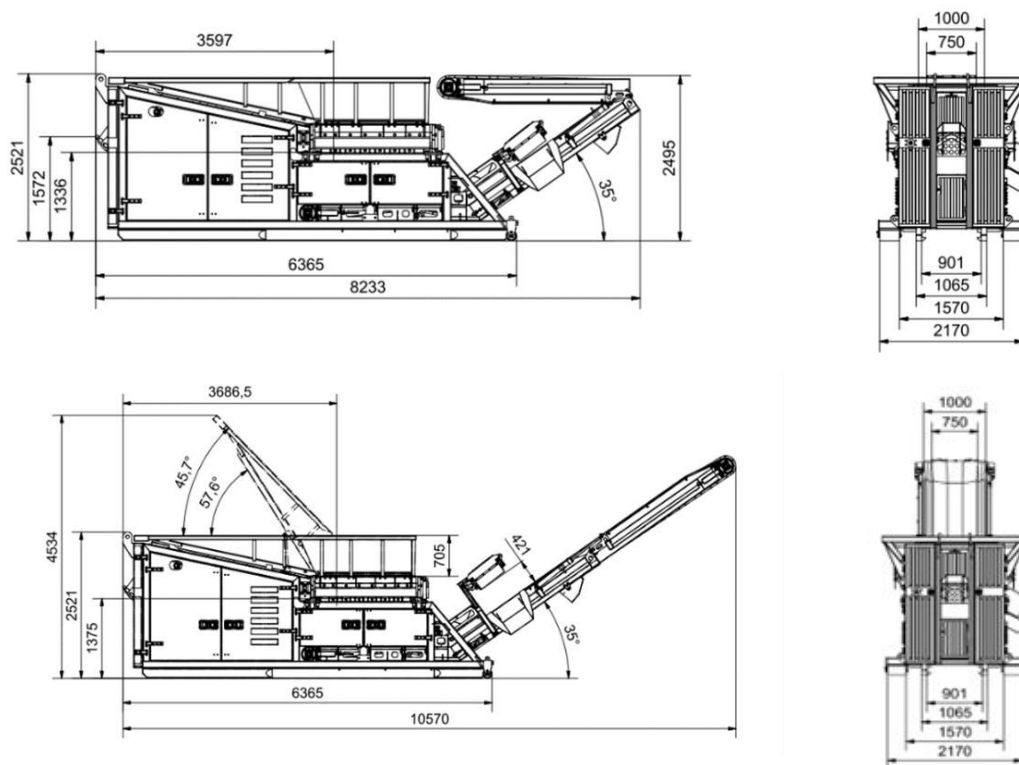

Transport dimensions

Machine length	mm / ft	8,233 / 27'
Machine height	mm / ft	2,521 / 8'3
Machine width	mm / ft	2,350 / 7'7

Operation dimensions

Machine length	mm / ft	10,570 / 34'7
Machine height	mm / ft	4,534 / 14'9
Machine width	mm / ft	2,350 / 7'7

Drive

Engine		CAT C7.1
Power	kW / HP	186 / 252
Emission standard		Tier 4f / EU-Stage V
Tank volume Diesel	liter / gal(US)	250 / 66
Tank volume DEF	liter / gal(US)	32 / 8.5

Filling area

Filling volume	m ³ / yd ³	6 / 7.8
Filling height	mm / ft	2,521 / 8'3 / hydraulically liftable
Filling width	mm / ft	4,860 / 15'9

Shredding area

Rotor 1 / 2 teeth	pcs. / pcs.	30 / 35
Rotor	pcs.	2
Rotor speeds	rpm	5 – 28 / individual / reversible
Rotor length	mm / ft	1,500 / 4'9
Rotor diameter	mm / ft	240 / 0.7' / (max. flight circle diameter 605 / 2')

Conveyor

Conveyor width	mm / ft	1,000 / 3'3
Conveyor discharge height	mm / ft	3,662 / 12'
Overbelt magnet	mm / ft	1,500 / 4'9 hydraulically adjustable

Chassis

Total machine weight	kg / lbs	Standard hooklift – frame 15,000 / 33,069
----------------------	----------	--

Electronics

24V Eggersmann *OneLogic* machine and drive Control

Varnishing

Machine		RAL 5010 blue
Chassis		RAL 9005 black
Conveyor frame		RAL 7040 grey
Layer thickness	μm	> 120

