


Technical data sheet

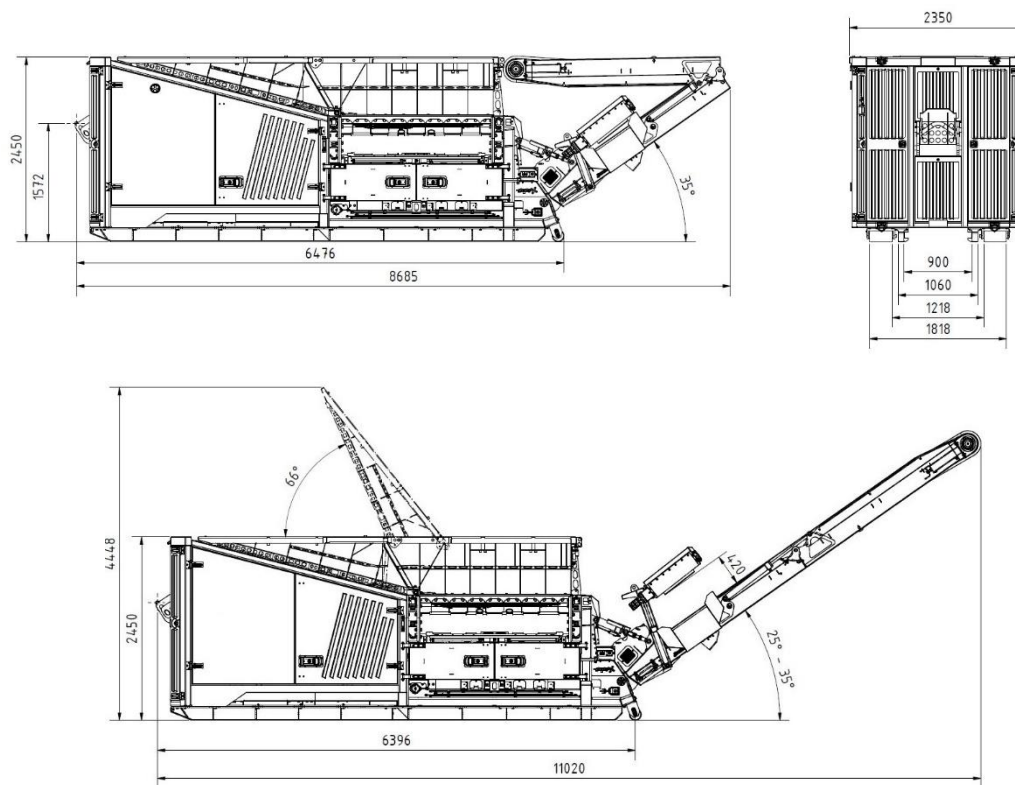

Transport dimensions

Machine length	mm / ft	8,685 / 28'5
Machine height	mm / ft	2,450 / 8'1
Machine width	mm / ft	2,350 / 7'7

Operation dimensions

Machine length	mm / ft	11,020 / 36'2
Machine height	mm / ft	4,448 / 14'6
Machine width	mm / ft	2,350 / 7'7

Drive

Engine		CAT C9.3
Power	kW / HP	280 / 380
Emission standard		Tier 4f / EU-Stage V
Tank volume Diesel	liter / gal(US)	400 / 105
Tank volume DEF	liter / gal(US)	42 / 11

Filling area

Filling volume	m ³ / yd ³	7.5 / 9.8
Filling height	mm / ft	2,450 / 8'1 / hydraulically liftable
Filling width	mm / ft	4,734 / 15'5

Shredding area

Rotor 1 / 2 teeth	pcs. / pcs.	40 / 40
Rotor	pcs.	2
Rotor speeds	rpm	5 – 23 / individual / reversible
Rotor length	mm / ft	2,034 / 9'4
Rotor diameter	mm / ft	240 / 0.7' / (max. flight circle diameter 605 / 2')

Conveyor

Conveyor width	mm / ft	1,200 / 3'9
Conveyor discharge height	mm / ft	2,842 – 3,695 / 9'3 – 12'1
Overbelt magnet	mm / ft	1,820 / 6' hydraulically adjustable

Chassis

Total machine weight	kg / lbs	Standard hooklift – frame 15,500 / 34.172
----------------------	----------	--

Electronics

24V Eggersmann *OneLogic* machine and drive Control

Varnishing

Machine		RAL 5010 blue
Chassis		RAL 9005 black
Conveyor frame		RAL 7040 grey
Layer thickness	μm	> 120

